

Electric Reach Truck

Model: CQD20H

AC

EPS
Option

Hot
Sale



Advantages:

STABILITY

- The large and strong chassis ensures sufficient stability of the forklift.
- The max lifting height can reach 9.5 metres.
- Use "H" type mast steel is imported from Germany enhance the use time and stability.
- Large and comfortable compartment with adjustable seat reflects a concept of ergonomic design.
- Use double controllers to realize stepless speed regulation of both lifting and travelling.

SAFETY AND HIGH EFFICIENCY

- Have safety travelling speed limited device in the mast. Travelling speed will automatic lowering when forks height is up 5M.
- Full hydraulic steering system makes turning easy and flexible.
- Adopts hydraulic brake for two front wheel and electric brake for driving motor, offer simple operation for travelling and braking.
- Integrated design of driving and steering system without chain transmission, resolve the problems of chain fall-off caused by chain transmission.


EASY MAINTENANCE

- Battery changing offers two type methods :
1) Side way battery changing by a trolley.
2) Automatic push-out and pull-in function by a simple battery handle controller.
- Bolt fixed back cover is easy to open for daily maintenance.


OPTION

- Joystick hydraulic controller.
- LCD display and camera (LCD for cold storage are available).
- Height selection and height position system.
- EX explosion proof type.

MODEL		CQD20				CQD20H		
Power		electric				electric		
Operation type		seated				seated		
Capacity/rated load	Q(kg)	2000				2000		
Lift height	h_1 (mm)	3000	5000	6200	7400	8000	8600	9500
Load centre distance	c(mm)	500				500		
Load distance,centre of drive axle to fork	x(mm)	380				320		
Wheelbase	Y(mm)	1500				1500		
Service weight	kg	3300	3700	3800	3900	4100	4150	4240
Axle loading,unladen front/rear	kg	2190/1110	2400/1300	2440/1360	2480/1420	2500/1600	2540/1610	2580/1660
Axle loading,fork advanced,laden front/rear	kg	745/4555	845/4855	893/4907	942/4958	673/5427	714/5436	786/5454
Axle loading,fork retracted,laden front/rear	kg	2033/3267	2244/3456	2284/3516	2324/3576	2266/3834	2305/3845	2346/3894
Tyres type		polyurethane				polyurethane		
Drive wheel	mm	Φ 406x152				Φ 406x152		
Fork wheel	mm	Φ 340x104				Φ 340x134		
Wheels,number front rear(x=driven wheels)		2,1				2,1		
Tread,front	b_{f1} (mm)	~				~		
Tread,rear	b_{r1} (mm)	1130				1350		
Tilt of mast/fork carriage forward/backward	α, β (Grad)	2,2(mast)				3,5(forks)		
Height,mast lowered	h_1 (mm)	2086	2240	2740	3190	3390	3590	3890
Free lift	h_2 (mm)	~	1700	2100	2500	2700	2900	3200
Height,mast extended	h_3 (mm)	3800	5800	7000	8200	8800	9400	10300
Height of overhead guard(cabin)	h_4 (mm)	2200				2200		
Seat height/stand height	h_5 (mm)	1068				1068		
Height of crura	h_6 (mm)	270				270		
Overall length	l_1 (mm)	2440				2510		
Length(barring fork)	l_2 (mm)	1950				1950		
Overall width	b_1 (mm)	1260				1510		
Fork dimensions	s/e/l(mm)	40/120/1070				40/120/1070		
Fork carriage DIN 15173,class/type A,B		A				A		
Fork-carriage width	b_2 (mm)	928				928		
Distance between fork-arms	b_3 (mm)	680				850		
Distance between support arms/loading surfaces	b_4 (mm)	900				1090		
Reach distance	l_3 (mm)	600				600		
Ground clearance,laden,below mast	m_1 (mm)	90				90		
Ground clearance,centre of wheelbase	m_2 (mm)	80				80		
Aisle width for pallets 1000x1200 crossways	A_1 (mm)	2880				2880		
Aisle width for pallets 800x1200 lengthways	A_2 (mm)	2930				2930		
Turning radius	W_1 (mm)	1820				1820		
Travel speed,laden/unladen	Km/h	8/8.3				8/8.3		
Lift speed,laden/unladen	m/s	0.19/0.2				0.19/0.2		
Lowering speed,laden/unladen	m/s	0.5/0.4				0.5/0.4		
Reaching speed,laden/unladen	m/s	0.1/0.1				0.1/0.1		
Gradeability,laden/unladen	%	10,12				10,12		
Acceleration time,laden/unladen	s	4.8,4.3				4.8,4.3		
Service brake		hydraulic				hydraulic		
Battery voltage,nominal capacity K5	V/Ah	48/500				48/500		
Battery weight	Kg	860				860		
Battery dimensions l/w/h	mm	1220x344x727				1220x344x727		
Type of drive control		DC/AC				DC/AC		
Operating pressure for attachments	bar	140	160	160	160	170		
Sound level at the driver's ear acc.to DIN 12053	dB(A)	70				70		

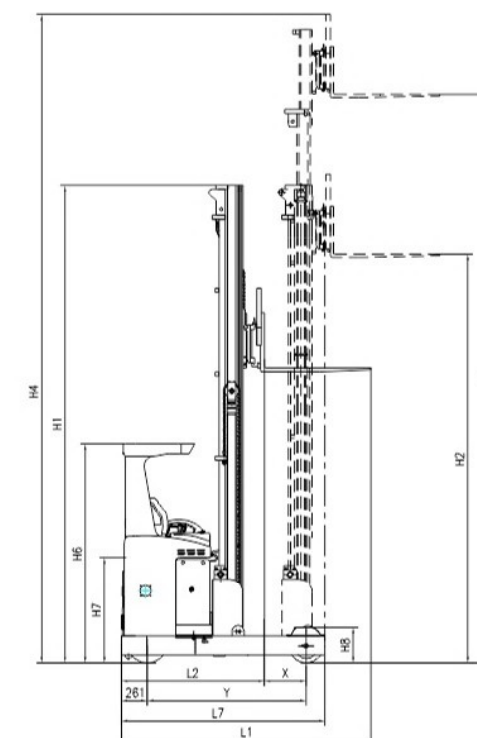

DIMENSIONS

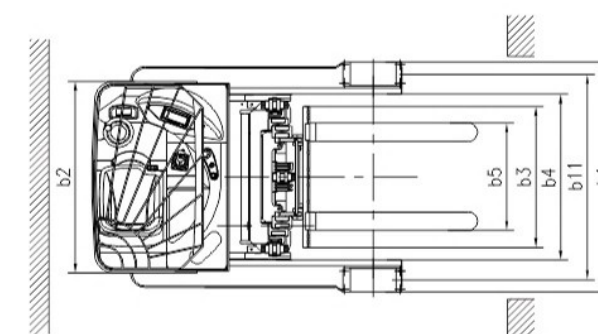

Optional of LCD display and camera for high level operation



Double controllers with CANbus communication to oil tube and wire



Optional of cabin

